



Wheel Well Guards

79151 - Installation Instructions

Ford F150 Raptor

PACKAGE CONTENTS:



Wheel Well Guard
Driver's Side (1)

Supplied Hardware
4 - #10 SEM Screws
2 - U-Clips




Wheel Well Guard
Passenger's Side (1)

TOOLS REQUIRED:

- Phillips Head Screwdriver
- 9/32" Socket / Driver
- Drill with 1/8th Inch Drill Bit

VEHICLE PREPARATION:


Your vehicle's rear fender wells should be cleaned prior to the installation of your new Husky Wheel Well Guards.

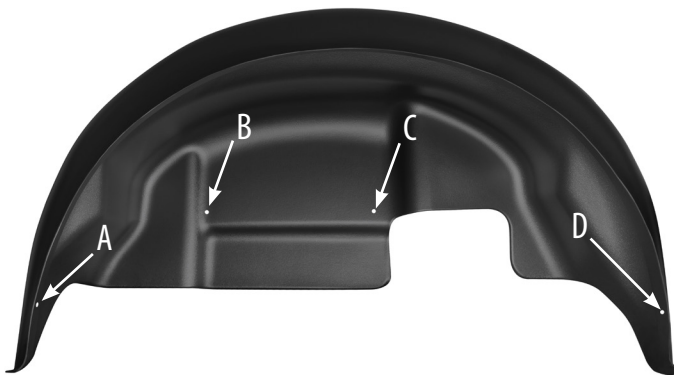

Installation

Read all directions thoroughly prior to the installation of your Wheel Well Guards.

A, B, C, & D are pre-drilled fastener locations for installation.

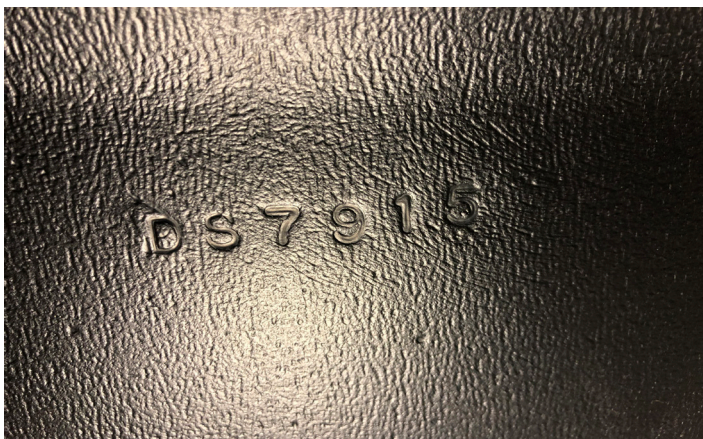

1. Check part number on the top of the Wheel Well Guard and identify DS & PS to determine which side to install.
 - DS 7915 installs on the driver's side.
 - PS 7915 installs on the passenger's side.



2. Install a u-clip over the factory hole at location B.



3. Remove the 8 factory hex head screws around the factory flare opening and set aside.



4. Install the Wheel Well Guard over the tire.



5. Push the Wheel Well up into the factory opening.



6. Insert the lower flap sections of the Wheel Well Guard into the fender between the fender well lip and the factory flare.



7. Tuck the rest of Wheel Well lip between the fender well lip and the factory flare



8. Install the supplied #10 SEM screw at location B through the Wheel Well Guard and into the U-Clip over the factory hole at location B.

9. Install 2 factory hex head screws into the pre-drill locations A and D.



10. Once all fasteners at locations A,B, & D are installed, use the hole at C location as a guide and drill a 1/8th inch hole.

11. Install the supplied #10 SEM screw at location C through the Wheel Well Guard and into the drilled hole.



12. Once all fasteners at locations A,B,C and D are installed, Install the remaining factory hex head fasteners into the factory flare. These screw will not go through the Wheel Well Guard. They will compress the Wheel Well Guard between the flare and fender mount.
13. Repeat steps 1-12 on the other side of the vehicle.

Congratulations,
You have now successfully installed
your new Husky Liners Wheel Well
Guards. If you have any questions
please call us at 1-800-344-8759.

HUSKY LINERS WHEEL WELL GUARDS LIMITED LIFETIME WARRANTY

HUSKY LINERS INC. WARRANTS YOUR HUSKY LINERS WHEEL WELL GUARD PROTECTION PRODUCT WITH A LIMITED LIFETIME WARRANTY TO THE ORIGINAL PURCHASER. IF YOUR FINISHED PRODUCT IS FOUND DEFECTIVE, HUSKY LINERS INC. WILL AUTHORIZE THE REPLACEMENT OF YOUR PRODUCT AT NO CHARGE TO THE ORIGINAL PURCHASER. THIS WARRANTY COVERS PRODUCT REPLACEMENT ONLY. HUSKY LINERS INC. WILL NOT PROVIDE A MONETARY REFUND FOR THE PRICE OF THE PRODUCT OR CHARGES INCURRED DURING INSTALLATION. THIS WARRANTY IS NOT TRANSFERABLE. HUSKY LINERS INC. ASSUMES NO LIABILITY FOR PRODUCT FAILURE DUE TO ACCIDENT, COLLISION, NEGLIGENCE, VANDALISM OR ABUSE.

THERE IS NO WARRANTY OF MERCHANTABILITY AND NO WARRANTY THAT THE PRODUCT SHALL BE FIT FOR ANY PARTICULAR PURPOSE OR USE. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS AND YOU MAY HAVE OTHER RIGHTS WHICH VARY FROM JURISDICTION.

THIS PRODUCT IS TO BE USED IN COMPLIANCE WITH ALL APPLICABLE STATE OR PROVINCIAL LAWS. INSTALLATION OF THIS PRODUCT IN A MANNER THAT VIOLATES STATE OR PROVINCIAL LAW IS A MISUSE OF THE PRODUCT AND VOIDS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTY OF MERCHANTABILITY. WINFIELD CONSUMER PRODUCTS SHALL NOT BE LIABLE IN ANY MANNER WHATSOEVER FOR DAMAGES RELATED TO THE USE OF THIS PRODUCT IN AN ILLEGAL MANNER.

FOR WARRANTY SERVICE CONTACT YOUR HUSKY LINERS DEALER OR CALL HUSKY LINERS INC. AT (800) 344-8759.